




HD2SD

Key Features

- The world's first HDcctv certified converter
- HD-SDI to CVBS converter (HD-SDI Loop-through output)
- BNC 1ch Input / 2ch outputs
- HD-SDI 1080p & 720p Video Format
- NTSC/PAL Auto-Output by detecting input video
- Standby mode for power saving
- Full-screen(16:9), Zoom-in mode(4:3) output
- 50/60Hz system compatible
- Power, Link LED indicator

Dimensions

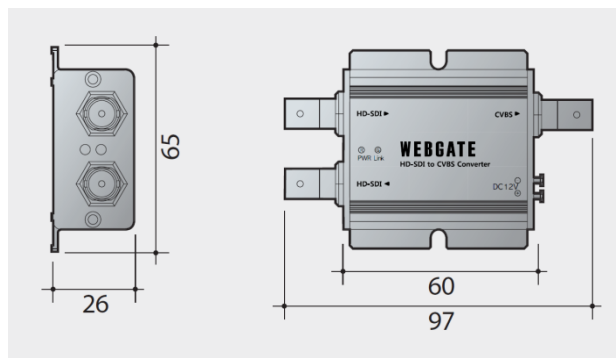

Specifications

VIDEO INPUT

Video input standard	1CH (HD-SDI SMPTE 292M)
Resolution	SMPTE 274M(1080i50/60, 1080p25/30) SMPTE 296M(720p25/30/50/60)

VIDEO OUTPUT

Video output standard	1CH CVBS(NTSC/PAL-auto change according to 25/30Hz) 1CH (HD-SDI SMPTE 292M)
-----------------------	--

INTERFACE

Indication LED	Power LED : Red, Link LED : Green
----------------	-----------------------------------

ENVIRONMENTAL & PHYSICAL

Dimension	97(W) x 65(D) x 26(H) mm
Weight	Approx. 120g
Operating temperature	0°C to +50°C / 20%RH to 80%RH
Input voltage	DC 12V
Power consumption	Max 2.2W
Approval	KC, FCC, CE, RoHS, HDcctv