




## HDMI2SDI

### Key Features

- HDMI to HD-SDI converter
- Selectable one HDMI among two HDMI input
- Auto detection on input image
- Mode selection switch for video output format selection
- HD-SDI embedded audio & RCA audio output
- Power, Link LED indicator

### Dimensions (Unit : mm)

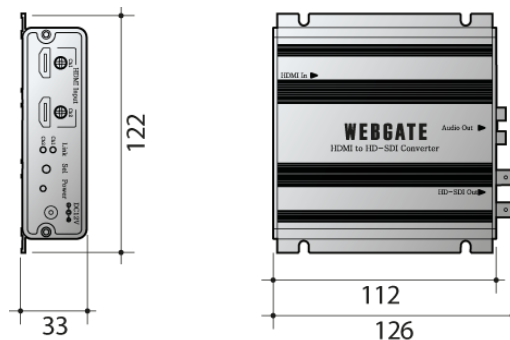

### Specifications

#### VIDEO INPUT

Video input standard	2CH (HDMI, selectable)
Resolution	SMPTE274M(1080i60/50, 1080p30/25) SMPTE296M(720p25/30/50/60)

#### VIDEO OUTPUT

Video output standard	2CH (HD-SDI SMPTE 292M)
Resolution	SMPTE 274M(1080i60/50, 1080p30/25) SMPTE 296M(720p25/30/50/60)

#### AUDIO

Audio output	2CH (Left, Right), RCA connector
--------------	----------------------------------

#### PERFORMANCE

Function	Include equalizing, Reclocking, Driver
----------	--

#### INTERFACE

Indication LED	Input channel indication LED (Green, Red), Power LED (Red)
Mode selection switch	4 Dip switches for operation mode setting

#### ENVIRONMENTAL & PHYSICAL

Dimension	126(W) x 122(D) x 33(H) mm
Weight	Approx. 310g(0.7 lbs)
Operating temperature	0°C to +50°C / 20%RH to 80%RH
Input Voltage	DV12V
Power consumption	Max 4W
Approval	KC, FCC, CE, RoHS