




WKC-100

Key Features

- Supports 255 DVRs, 255 Speed dome camera
- PTZ dome camera control via DVR or CMS
- Unit and channel control which are connected to Control Center
- Supports Preset, Tour, Pattern, Group and other major functions
- Supports RS485/422/232
- Supports various protocols (Pelco-D, Pelco-P and so on)

Dimensions

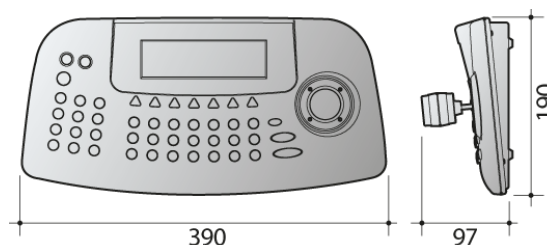

Specifications

DEVICE CONNECTION

| | |
|-----------------|--|
| Support Devices | HD/MH/EH/LH series DVR Pelco-D/Pelco-P protocol supported camera Control Center Software |
|-----------------|--|

COMMUNICATION

| | |
|----------|---------------------------------------|
| Method | RS485/RS422/RS232 |
| Cascade | Up to 255 keyboards with Master/Slave |
| Protocol | EZ,HWL,S2,S2e,Pelco-D, Pelco-P |
| Password | Master,User Login |

INTERFACE

| | |
|-----------|----------------------|
| Joy Stick | 3 Axis Joy Stick |
| LCD | 30 x 8 Character LCD |

ENVIRONMENTAL & PHYSICAL

| | |
|-----------------------|------------------------------|
| Dimension | 390(W) x 190(D) x 97(H) |
| Weight | Approx. 1.2kg |
| Operating temperature | 0°C to +50°C / 0%RH to 90%RH |
| Input Voltage | DC12V / 0.5A |
| Power Consumption | Max 6W |