

Mobile Application Software


WebEye



Key Features

- Mobile Viewer for iPhone / Android phone
- Supports MH/LH/EH/HD series DVRs
- Max. 16 DVR Support
- Capable to connect a unit that has dynamic IP
- Supports QCIF/CIF/Half/D1/720p/1080p resolutions
- Single/Quad screen monitoring
- Video streaming up to 30fps
- Supports PTZ control
- Supports D-Zoom of HD video
- Unit status by searching system log
- Unit status check by searching System log
- Alarm history check by searching Event log

Screen Shots

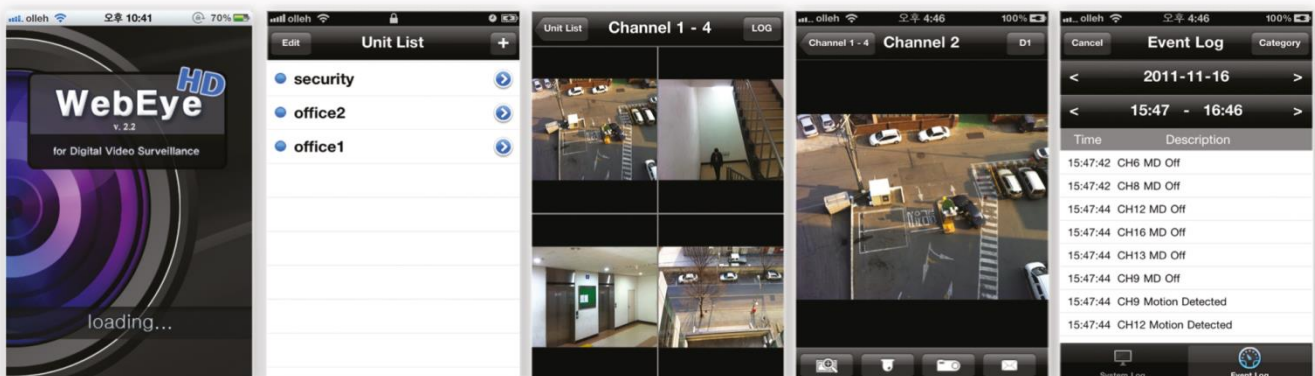

Specifications

	iOS	Android
SUPPORT		
H/W	iPhone 3GS/4G, iPhone 5G, iPod Touch 3G/4G, iPad, iPad2	All Android Phones
OS	iOS 4.2 or higher	Android 2.3 or higher
Device	HD Series DVR LH/EH/MH Series DVR MD Series DVR WinRDS	HD Series DVR LH/EH/MH Series DVR MD Series DVR WinRDS
SERVER		
List manager	Add, Remove, Modify, Rearrange	Add, Remove, Modify, Rearrange
Address	IP, URL(DNS/DDNS), WRS	IP, URL (DNS/DDNS), WRS
Port	Support	Support
ID/Password	Support	Support
Discovery	TCP, WRS (up to 16)	TCP, WRS (up to 20)
VIDEO INPUT		
Protocol	WESP	WESP
Standard	NTSC, PAL, HD	NTSC, PAL, HD
Resolution	QCIF, CIF, HALF, D1, 720p, 1080p	QCIF, CIF, HALF, D1, 720p, 1080p
Compression	JPEG, H.264	JPEG, H.264
VIDEO DISPLAY		
Division	Single or Quad	Single or Quad
Frame rate	MAX CIF 30, Half 20, D1 7, 720P 4, 1080P 1, JPEG 1 fps (It depends on network)	
DIGITAL ZOOM		
Support	4X	4X
Thumbnail View	-	Support
PTZ		
Protocol	CGI call	WESP
Command	Zoom In/Out, Tilt Up/Down, Pan Left/Right	Zoom In/Out, Tilt Up/Down, Pan Left/Right
LOG		
Type	System Log, Event Log	System Log, Event Log
Protocol	WESP	WESP
Search	Date (Event Log - Date + Time)	Date (Event Log - Date + Time)
System log filter	Nothing	Nothing
Event log filter	Status&Action "CH Pre Alarm Start", "CH Post Alarm Stop", "CH Recording Start", "CH Recording Stop", "Manual Recording Start", "Manual Recording Stop", "Unknown Code"	Status&Action "CH Pre Alarm Start", "CH Post Alarm Stop", "CH Recording Start", "CH Recording Stop", "Manual Recording Start", "Manual Recording Stop", "Unknown Code"
	Text "Text Input"	Text "Text Input"
	Motion "Motion Detected", "MD Off"	Motion "Motion Detected", "MD Off"
	Alarm "Sensor On", "Sensor Off", "CH Network Event On", "CH Network Event Off", "CH Site Connected", "CH Site Disconnected", "CH Site Disconnected(Cont.)", "CH No Video", "CH Video Detected", "Bookmark"	Alarm "Sensor On", "Sensor Off", "CH Network Event On", "CH Network Event Off", "CH Site Connected", "CH Site Disconnected", "CH Site Disconnected(Cont.)", "CH No Video", "CH Video Detected", "Bookmark"
Limited	Up to 1000	Up to 1000